



Header Box

Exhaust Fan Range

150mm Spigot – 250SX series

The contemporary and innovative 250SX series header box fan is designed for optimum performance and energy saving. Suitable for a mounted application even in tight roof cavities.

- + Super powerful 375 m³/h airflow – for rooms up to 40m³
- + Extra quiet operation
- + Mounting clips for easy installation
- + Built-in backdraft damper
- + Long life ball bearing motor
- + Complies with AS/NZS 60598 & SAA
- + Standard 295mm round cut-out – easy retro fit
- + IPX4 Rated
- + Adjustable **RUN-ON TIMER** from 3–30 minutes (RFT250 model)

375m³/h

**TRADE
TOUGH**

IPX4 RATED



**DIY PLUGS
& LEADS**



**HIGH
AIR FLOW**



**BALL BEARING
MOTOR**



**LOW NOISE
OUTPUT**

Alpine Ventilation's AC Header Box Exhaust Fans are a premium, trade quality range that sets a new standard in performance, noise and ease of installation. Stiff centrifugal ABS blades combined with a powerful motor with Japanese ball bearings provide the highest performance and reliability available. These fans are ideal for both residential and light commercial applications.

Features



Matte finish
ABS casing




Centrifugal
impeller with
stiff ABS blades



Fast
mounting
clips



Clip-on face

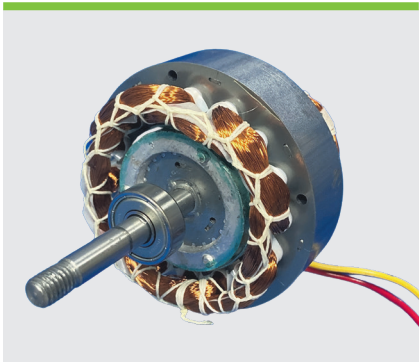

Japanese
ball bearing
motor




DIY plug in
(2 plugs for run-on
timer model)


Specifications

PRODUCT CODE	DESCRIPTION	BARCODE
RF250	Header Box Fan 250SX	9350571002912
RFT250	Header Box Fan with timer 250SX	9350571003056

- + High quality ABS impeller and casing (not PP or PS)
- + Commercial grade motor with Japanese bearings and copper wiring
- + Single piece clip-on 150mm (d) spigot
- + Backdraft damper to prevent drafts and maximise energy efficiency
- + Swing clips for easy installation
- + Can be retrofitted to replace a standard 250mm fan with a 295mm cut-out
- + Clip-out face for easy cleaning
- + Suitable for longer duct runs
- + Low profile - ideal for multi-storey buildings
- + Adjustable run-on timer from 3-30 minutes (RFT250 model)

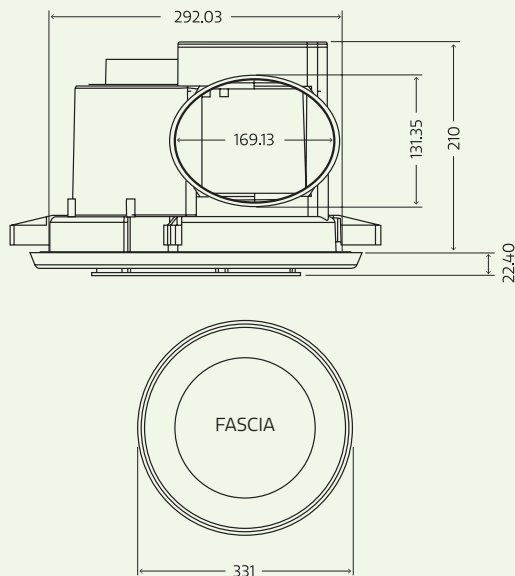

Model	RF250/RFT250
Duct Size	150mm
Type	AC Fan
Air Flow	104 L/S, 375 m ³ /hr
Watt	60
Noise @ 3M	38db
IP Rating	IPX4
Min. Install Depth	210mm
Cut-out size	295mm
Voltage	220-240v-50Hz
Current	0.29A
Weight	3.4kg
Standards Compliance	AS/NZS 60335 AS/NZS 60598, IEC 60665

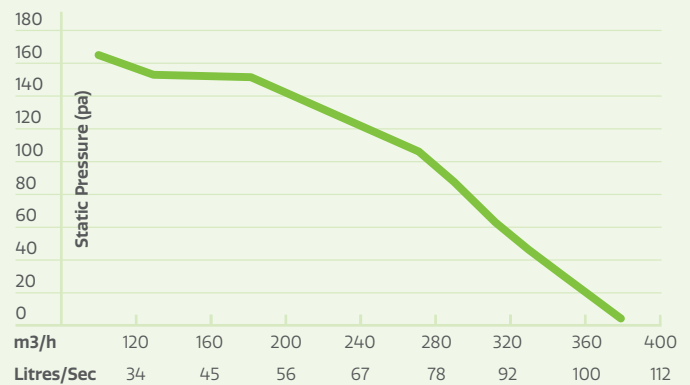

New Grilles Coming Soon



Black round




Black round with LED



White round with LED




Black square

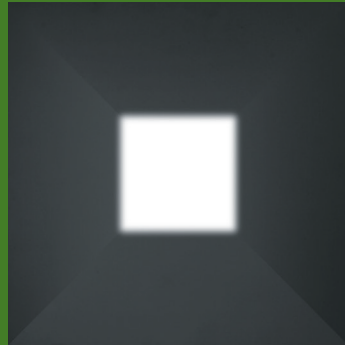

Black square with LED



White square

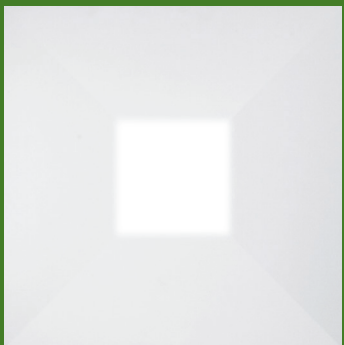

White square with LED