

Compact Roof Vent Technical Data



General

Ventilator Type	Ducted Ventilator
Bush Fire Rating	BAL-40

Material

Component	Material
Vent Cowl	1.0mm Galvanised Steel
Mesh	2.0mm aperture Galvanised Steel Mesh with 0.3mm wire
Neck	0.55mm Galvanised Steel
Adapter	0.7mm Galvanised Steel


Applicable Product Codes

Product Code	Description
VR150M	Monument (Powdercoated)
VR150G	Galvanised (Powdercoated)



Dimensions

Face

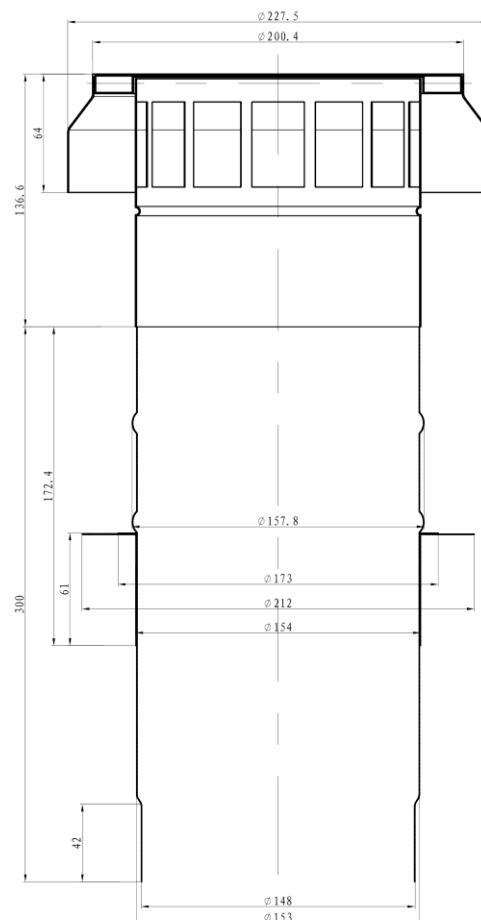

5 Amay Crescent, Ferntree Gully Vic 3156
P | 03 9758 7844 F | 03 9758 7804
E | enquiries@partnerpacific.com

Component	Neck Diameter (mm)	Height (mm)	Top Diameter (mm)	Weight (g)
Cowl/Mesh	200.4	64	227.5	684
Neck	157.8	300	157.8	596
Total	N/A	400	N/A	1280

Compliance with the National Construction Code

This compact roof vent is designed to assist with condensation management and ventilation under NCC 2022 provisions, Section 10.8.2 (Exhaust Systems) & 10.8.3 (Ventilation of Roof Spaces).

Compliance with AS3959

When installed correctly, this compact roof vent is compliant with the fire rating requirements of AS3959-2009 up to BAL-40, due to ember guard/mesh ≤ 2 mm made of corrosion-resistant metal.

Conditions of Storage, Maintenance and Use

We recommend using in conjunction with our Flexible nude duct

Keep stored in a dry and cool area

Do not attempt repair or maintenance without contacting Partner Pacific.

Limitations of Use

Not to be used for gas flueing

Do not use for exhausting hazardous or explosive materials