

General

Ventilator Type	Ducted Aluminium Louvered Ventilator
Bush Fire Rating	BAL-40


Applicable Product Codes

Product Code	Description
VWR150	150mm Neck
VWR200	200mm Neck



Dimensions

Top (Face)

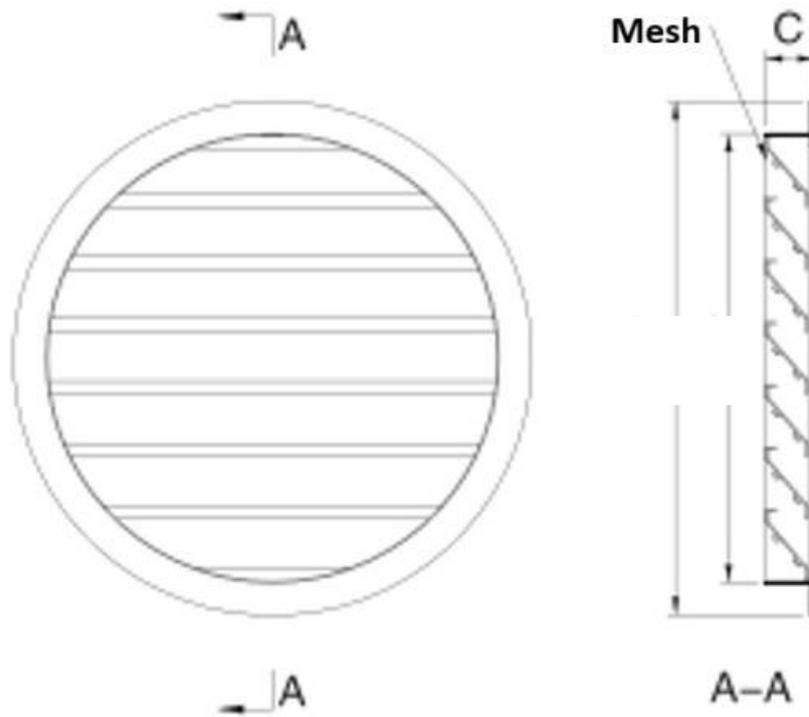

(mm)	ϕ A	ϕ B	C
150	140	200	40
200	190	250	40

Compliance with the National Construction Code

This snap-in eave vent is designed to assist with condensation management and ventilation under NCC 2022 provisions, Section 10.8.2 (Exhaust Systems) & 10.8.3 (Ventilation of Roof Spaces).

Compliance with AS3959

When installed correctly, this louvered wall vent is compliant with the fire rating requirements of BAL-40, due to ember guard/mesh ≤ 2 mm made of corrosion-resistant metal.

Conditions of Storage, Maintenance and Use

We recommend using in conjunction with our Flexible nude duct

Keep stored in a dry and cool area

Do not attempt repair or maintenance without contacting Partner Pacific.

Limitations of Use

Do not use for exhausting hazardous or explosive materials