

General

Ventilator Type	Natural Ventilator
Bush Fire Rating	BAL-40

Material

Component	Material
Vent Face	Aluminium
Mesh	2.0mm aperture Aluminium Mesh with 0.3mm wire
Flange	Steel
Adapter	ABS Plastic


Applicable Product Codes

Product Code	Description
BV150	150mm Weatherproof Brick Vent




Dimensions


Face

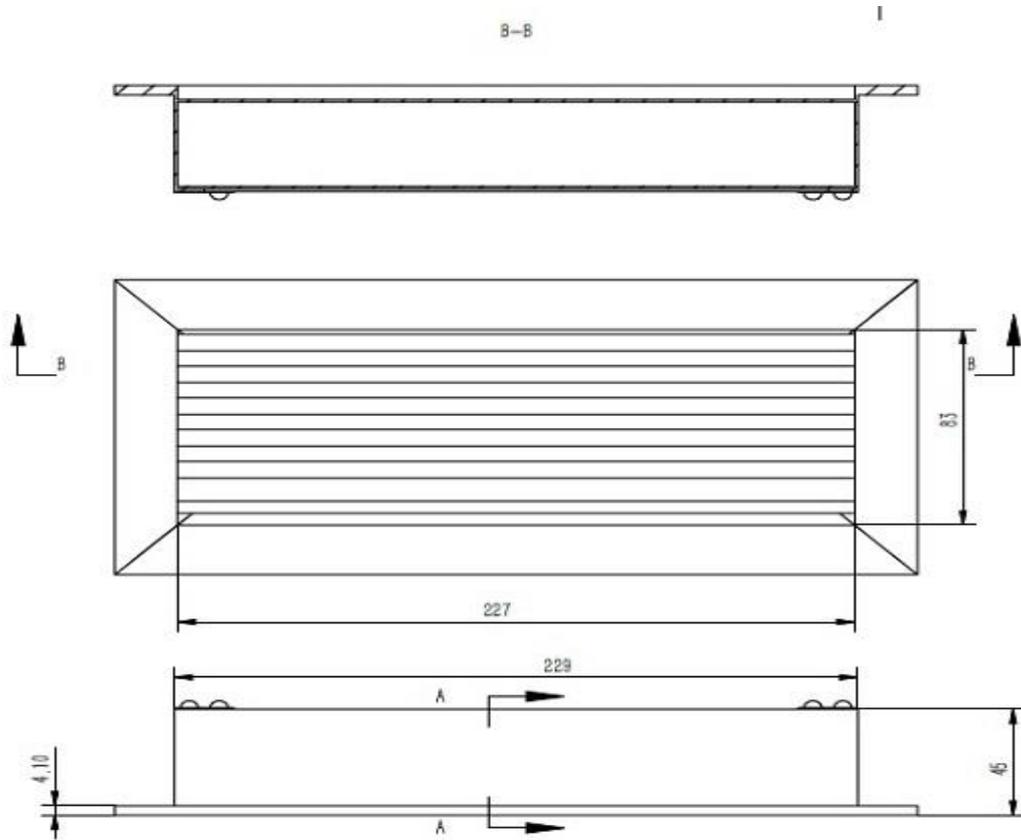

Flange

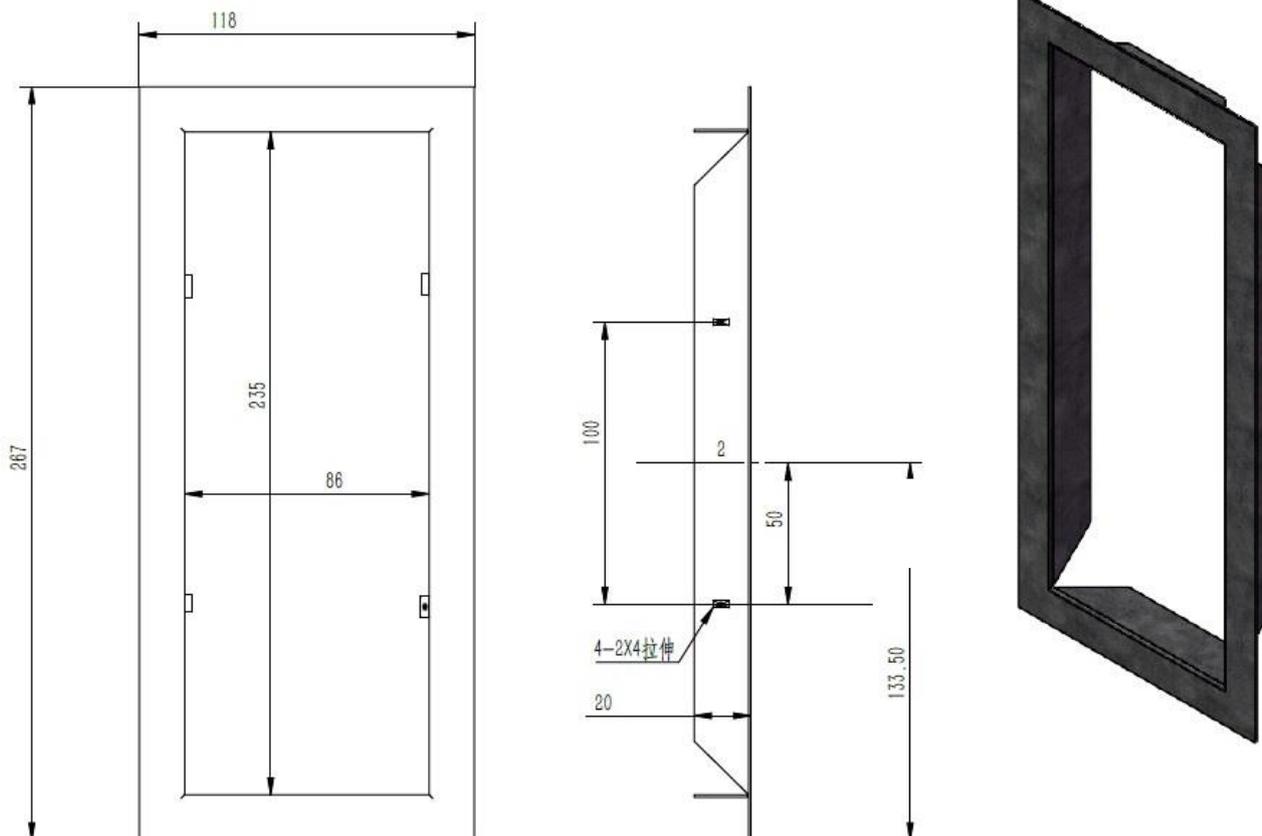

Adapter

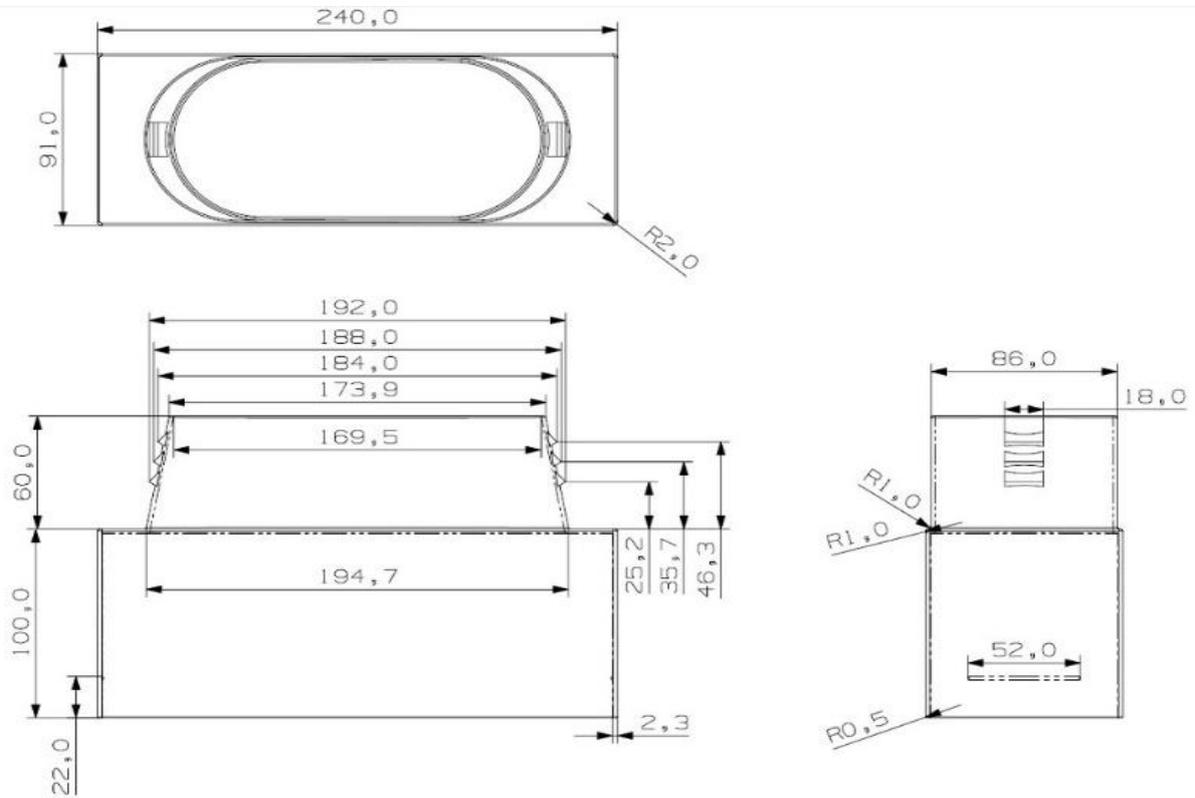

Component	Weight
Vent Face	335g
Adapter	356g

Compliance with the National Construction Code

When installed correctly, Aluminium brick vents can be used to assist with compliance under National Construction Code (NCC) provisions of 10.8.2.

Compliance with AS3959

When installed correctly, Aluminium Brick vents are compliant with the fire rating requirements of AS3959-2009 up to BAL-40 (fire test certified).

Conditions of Storage, Maintenance and Use

We recommend using in conjunction with our Flexible nude duct

Keep stored in a dry and cool area

Do not attempt repair or maintenance without contacting Partner Pacific

Limitations of Use

Not to be used for gas flueing. Do not use for exhausting hazardous or explosive materials.