

## General


Ventilator Type	Aluminium Eave Ventilator
Bush Fire Rating	BAL-40

## Material Composition


Material	Composition % of Total Product
Epoxy / Polyester Resin (Powder Coating)	10%
Aluminium	90%

Component	Length (Face Front)	Height (Face Front)	Weight (g)	Opening Size (up to)	Thickness
AEV2040W	400mm	200mm	158g	370x170mm	1mm

\*Figures provided are for a single vent

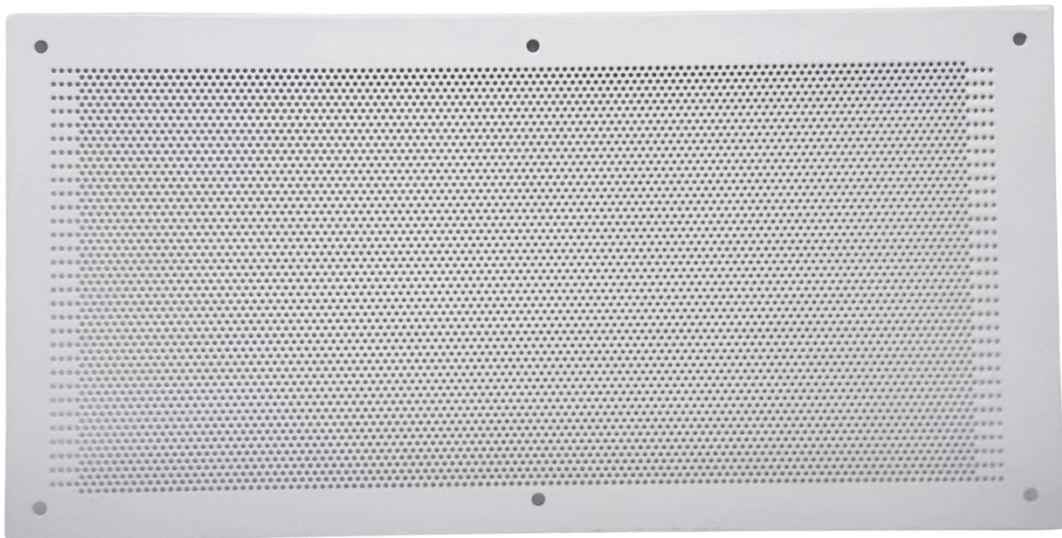

**Dimensions**

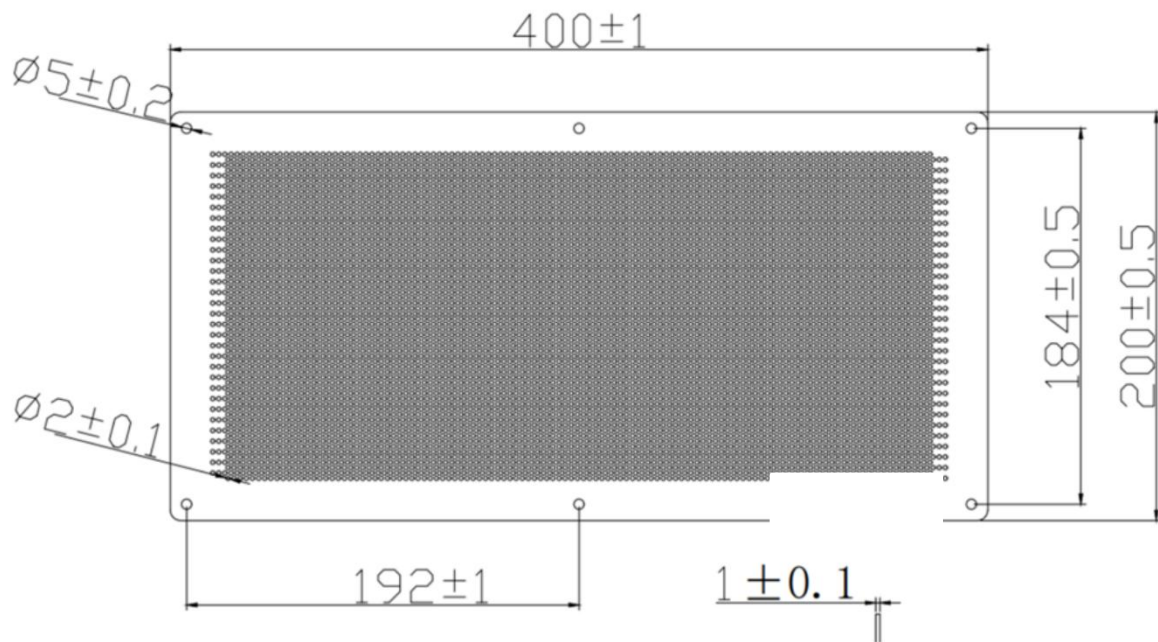

**Screw Holes: 6 x 5mm**  
**Ventilation Holes: 7316 x 2mm**

## **Compliance with the National Construction Code**

This Aluminium eave vent is designed to assist with condensation management and ventilation under NCC 2022 provisions, Section 10.8.3 (Ventilation of Roof Spaces).

## **Compliance with AS3959**

When installed correctly, this snap-in eave vent is compliant with the fire rating requirements of AS3959-2009 up to BAL-40, due to ember guard  $\leq 2$  mm made of corrosion-resistant metal.

## **Conditions of Storage, Maintenance and Use**

Keep stored in a dry and cool area

Do not attempt repair or maintenance without contacting Partner Pacific.

## **Limitations of Use**

Do not use for exhausting hazardous or combustible gases.