

## General

Ventilator Type	Metal Eave Ventilator
Bush Fire Rating	BAL-40

## Material Composition


Material	Composition % of Total Product
Epoxy / Polyester Resin (Powder Coating)	10%
Metal	90%

Component	Width (Face Front)	Height (Face Front)	Weight (g)	Opening Size (up to)	Thickness
MEV2040W	200mm	400mm	123g	370x170mm	3mm

\*Figures above are for a single louvered vent



## Dimensions

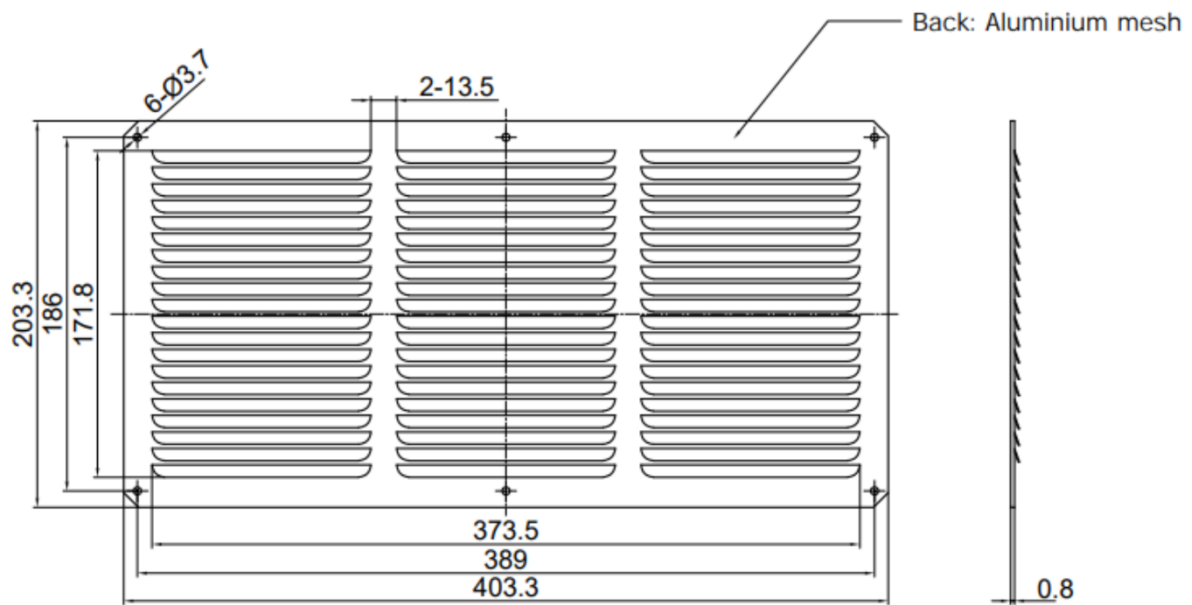

**20 Louvers x 3 Rows = 60 Total Louvers**

**Open Area: 19,000mm<sup>2</sup>**

## **Compliance with the National Construction Code**

This aluminium louvered eave vent is designed to assist with condensation management and ventilation under NCC 2022 provisions 10.8.3 (Ventilation of Roof Spaces).

## **Compliance with AS3959**

When installed correctly, this snap-in eave vent is compliant with the fire rating requirements of AS3959-2009 up to BAL-40, due to ember guard/mesh  $\leq 2$  mm made of corrosion-resistant metal.

## **Conditions of Storage, Maintenance and Use**

Keep stored in a dry and cool area

Do not attempt repair or maintenance without contacting Partner Pacific.

## **Limitations of Use**

Do not use for exhausting hazardous or combustible gases.