


Ducted Aluminium Fascia Vents

Alpine Ventilation has launched a range of ducted fascia vents to assist in compliance with NCC 2022 10.8.2. Venting at the fascia can be a great alternative for a building to venting via the roof, eave or wall. The range comes in 11 popular colours plus a paintable version. Adapter kit contains 3m of rectangular ducting for easy connection to the adapter. These vents are fast to install and blend in, for an unobtrusive look.

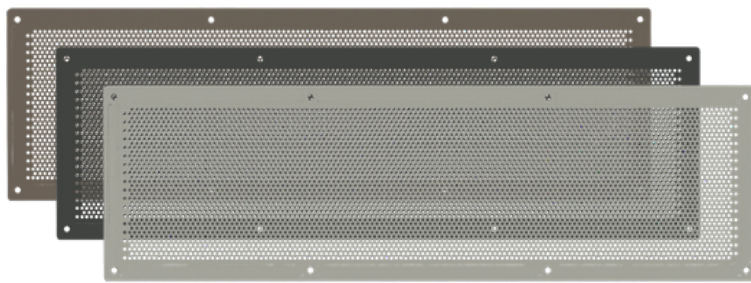


Features	Benefits
1.0mm aluminium face construction	→ Durable construction for maximum weather protection
11 Colorbond colours (plus paintable)	→ Blends unobtrusively into the fascia
2.0mm punched holes in face	→ BAL-40 compliant to AS3959-2009
8 rivet hole design	→ Fast and easy installation
150mm d adapter kit	→ Ready to connect to fan or rangehood
3m x 150mm d rectangular ducting with round end	→ Ideal for tight spaces
Open area 14,016mm ²	→ Can be used unducted for 10.8.3

Code	Description	Size (mm)	Cut-out Size (mm)	Carton Qty
AEVS1240MM	Aluminium Fascia Vent Monument	120 x 400	92 x 370	20
AEVS1240NS	Aluminium Fascia Vent Night Sky	120 x 400	92 x 370	20
AEVS1240SM	Aluminium Fascia Vent Surfmist	120 x 400	92 x 370	20
AEVS1240SG	Aluminium Fascia Vent Shale Grey	120 x 400	92 x 370	20
AEVS1240BS	Aluminium Fascia Vent Basalt	120 x 400	92 x 370	20
AEVS1240WG	Aluminium Fascia Vent Woodland Grey	120 x 400	92 x 370	20
AEVS1240DW	Aluminium Fascia Vent Dover White	120 x 400	92 x 370	20
AEVS1240DN	Aluminium Fascia Vent Dune	120 x 400	92 x 370	20
AEVS1240WS	Aluminium Fascia Vent Windspray	120 x 400	92 x 370	20
AEVS1240JP	Aluminium Fascia Vent Jasper	120 x 400	92 x 370	20
AEVS1240WB	Aluminium Fascia Vent Wallaby	120 x 400	92 x 370	20
AEV1240P	Aluminium Fascia Vent Paintable	120 x 400	92 x 370	20
FAKS1240	Aluminium Fascia Vent Adapter Kit*	120 x 400	92 x 370	12

*Adapter kit contains adapter, 3mx150mm rectangular ducting, rectangular clamp and round clamps

Monument®, Surfmist®, Night Sky®, Dune®, Woodland Grey®, Basalt®, Jasper®, Dover White®, Shale Grey®, Windspray® & Wallaby® are trademarks of Bluescope Steel Limited.



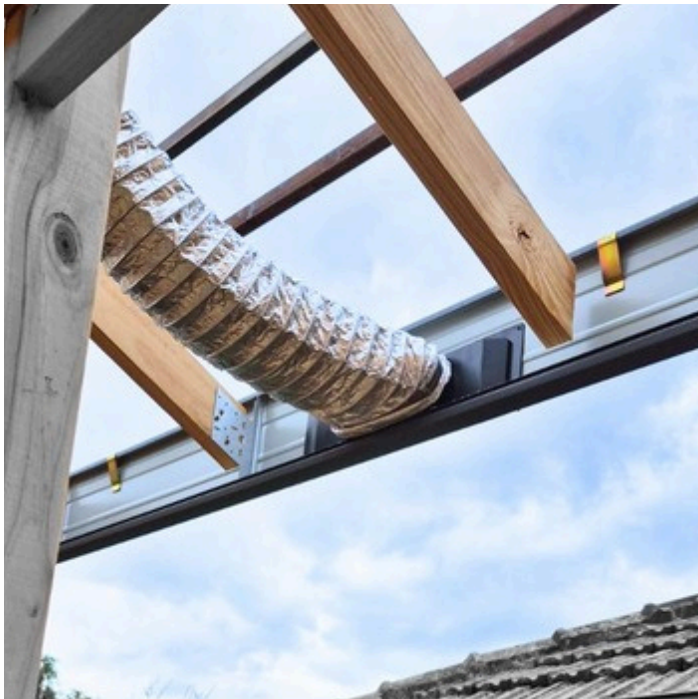

Installation Instructions

1. Select a location that is clear of structural, electrical and plumbing obstructions.
2. Mark out and cut a 370mm x 92mm rectangular hole in the fascia (template provided).
3. Run strips of a BAL-40 compliant silicone sealant around the edges (recommended not essential)
4. Place in front of fascia with adapter behind fascia and secure with rivets.
5. Secure rectangular end of ducting to neck of adapter with rectangular clamps and (preferably) duct tape.
6. Secure round end of ducting to exhasut fan or rangehood with round clamps and (preferably) duct tape.