

General

Ventilator Type	Metal Eave Ventilator
Bush Fire Rating	BAL-40

Material Composition


Material	Composition % of Total Product
Epoxy / Polyester Resin (Powder Coating)	10%
Metal	90%

Component	Width (Face Front)	Height (Face Front)	Weight (g)	Opening Size (up to)	Thickness
MEV2040G	200mm	400mm	123g	370x170mm	3mm

*Figures above are for a single louvered vent



Dimensions

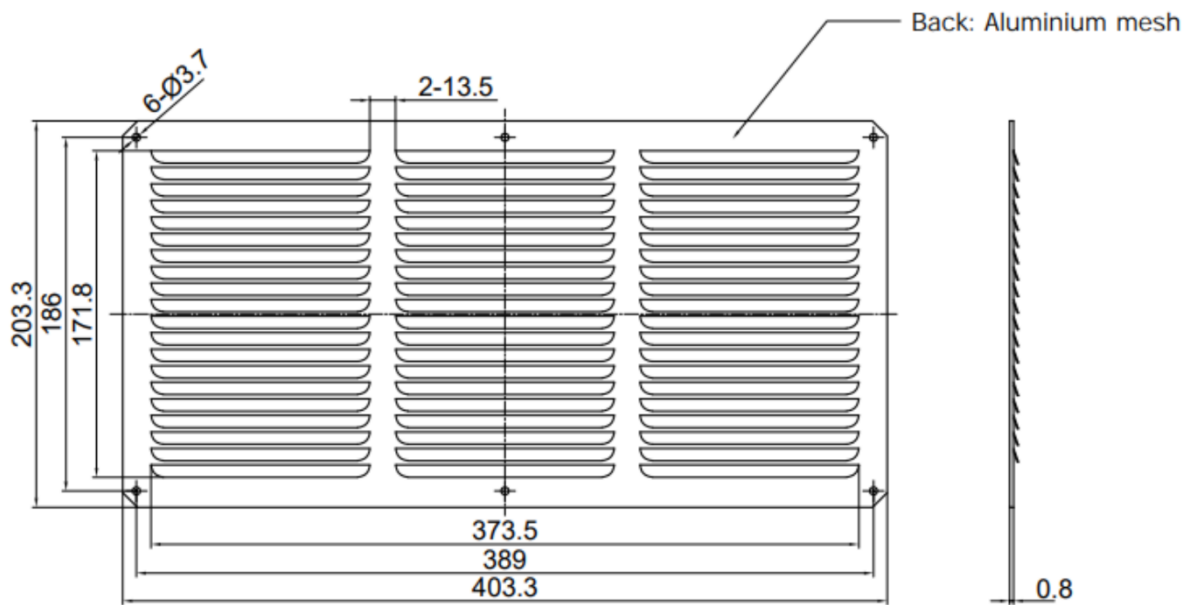

20 Louvers x 3 Rows = 60 Total Louvers

Open Area: 19,000mm²

Compliance with the National Construction Code

This aluminium louvered eave vent is designed to assist with condensation management and ventilation under NCC 2022 provisions 10.8.3 (Ventilation of Roof Spaces).

Compliance with AS3959

When installed correctly, this snap-in eave vent is compliant with the fire rating requirements of AS3959-2009 up to BAL-40, due to ember guard/mesh ≤ 2 mm made of corrosion-resistant metal.

Conditions of Storage, Maintenance and Use

Keep stored in a dry and cool area

Do not attempt repair or maintenance without contacting Partner Pacific.

Limitations of Use

Do not use for exhausting hazardous or combustible gases.